

# Conplug® (F)

## Very Fast Setting Water plug for Rapid Water Stoppage

### DESCRIPTION

**Conplug (F)** is an ultra fast setting permanent waterplug for rapid water stoppage. Ready to use mixed with water it becomes a powerful waterplug to stop pressure leaks.

### USES & ADVANTAGES

Uses include to stop pressure and seepage leaks through concrete and rocks in: joints, culverts, basements, tunnels, dams, pools, subways etc.

#### Advantages include:-

- Contains no chloride.
- Easy to mix (add water).
- Permanent.
- Good adhesion.
- Non cracking. Almost no shrinkage.
- Ultra fast setting.
- No corrosion.

### PROPERTIES

<b>Appearance:</b>	Grey powder
<b>Bulk Density:</b>	1.02-1.05
<b>Fresh Wet Density:</b>	1.99
<b>pH Value of Paste:</b>	9-11
<b>Hardening Time:</b>	20-25 seconds
<b>Water Content:</b>	26 % by weight of <b>Conplug (F)</b>


*\* Properties are typical under laboratory conditions and do not constitute a specification. Field trials are recommended.*

### APPLICATION

#### For Light Water Leak Just Plug with Conplug (F)

Prepare concrete or rock in "V" shape around leak. Remove loose material, clean prior to application of **Conplug (F)**.

Start filling from outside work toward centre of the leak. The material should be held in place & leveled off. If excessive water pressure is apparent use a wooden plug hammered home to stop the flow of water then cover and secure in position with **Conplug (F)**.

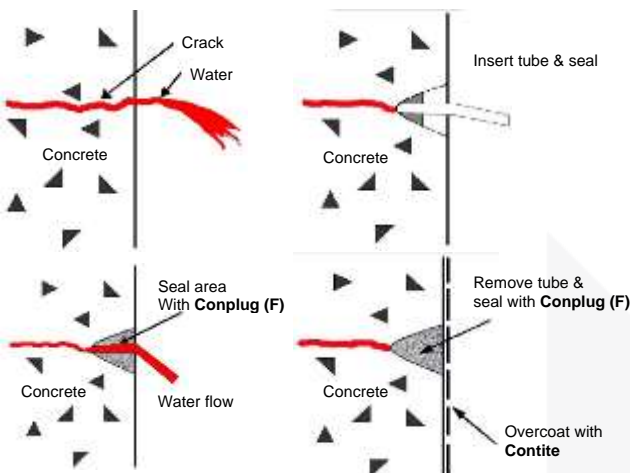

Other admixtures, cements or sand should not be added to **Conplug (F)**. Keep container sealed.

### PACKAGING

5 kg tin & 20 kg plastic pail.

### STORAGE & SHELF LIFE

Store in dry shaded conditions. The shelf life is at least 12 months if kept dry in original packaging. High temperatures and humidity may reduce shelf life.

### HEALTH & SAFETY

**Conplug (F)** is alkaline, use protective gloves. If gets into eyes clean out with water immediately. Mix in small quantities.

### TECHNICAL SERVICE

The Cormix International Technical Service Department is available to assist you in the correct use of our products and its resources are at your disposal entirely without obligation.

### QUALITY ASSURANCE

ISO 9001 : 2015 verified by TUV Nord.  
ISO 14001 : 2015 verified by Lloyd's Register International.

### CONTACT DETAILS

#### Cormix International Limited

89 Romklao Rd., Sansab, Minburi, Bangkok 10510

Tel. (66 2) 917 3955-8, 117 3396

<http://www.cormix.com>

E-mail: [info@cormix.com](mailto:info@cormix.com)

Rev.002 Feb 2022

**NOTE :** Every reasonable precaution is taken in the manufacture of all CORMIX- products to ensure that they comply with CORMIX's high standard of quality. The recommendations and properties of the product are based upon what is believed to be the most reliable information available, and are not intended as recommendations which infringe on other patents. Although all CORMIX-products are subject to rigid quality tests, no specific guarantee can be given, because results depend, not only on quality, but also on other factors beyond our control. We welcome therefore consultation in the event of doubt concerning application, or performance, and point out those oral recommendations, which vary from the instructions contained herein, are not binding without written confirmation by CORMIX. All transactions shall be subject to our terms and conditions of sale-delivery-and-service. This data sheet supersedes the previous one and a reprint may be issued without notice to supersede this edition, as and when deemed necessary. The information given in this leaflet is to the best of our knowledge true and reliable. Field service where provided does not constitute supervisory responsibility. Our guarantee is therefore limited to the quality of materials delivered.